



## Technical Specifications

### ■ Engine

Machine	30G MCM Wheel Loader
Model	Deutz WP6G125E22 Euro 3
Net Peak Power	92kW / 123hp
Type	Direct Injection, Water Cooled
No. of Cylinders	Diesel 6-cylinder Engine
Fuel Tank Capacity	90 Litres

### ■ Transmission System

Type	Torque Converter	
Gears Forward/Reverse	4 Forward/2 Reverse	
Travel Speed	km/h	20-30
Max. Torque	Nm	366
Transfer Case	4WD	
Brake Control	Air Over Hydraulic	

### ■ Operation Dimensions

<b>A</b> Total Travel Length	mm	7050
<b>B</b> Total Travel Height	mm	3120
Total Travel Width	mm	2430
<b>C</b> Wheel Base	mm	2740
Bucket Width	mm	2300
Wheel Track	mm	1665


### ■ Attachments

Augers	Breakers	Brush Cutters	Buckets	Earth Drills
Forks	Grapples	Rippers	Shears	And More

### ■ Operation Parameters

Operating Weight	kg	9,800
Rated Load	kg	3,000
Bucket Capacity	m <sup>3</sup>	1.7
<b>D</b> Max. Dumping Height	mm	3250
<b>E</b> Max. Working Height	mm	3400
<b>F</b> Min. Dumping Distance	mm	1400
Max. Dumping Angle	degrees	40-45
Max. Tractive Force	kN	89
Max. Breakout Force	kN	138
Hydraulic Flow Rate	L/min	240
System Pressure	MPa	16
Min. Turning Radius	mm	5860
<b>G</b> Min. Ground Clearance	mm	430

\*Under our policy of continuous improvement, we reserve the right to change technical data and design without prior notice.

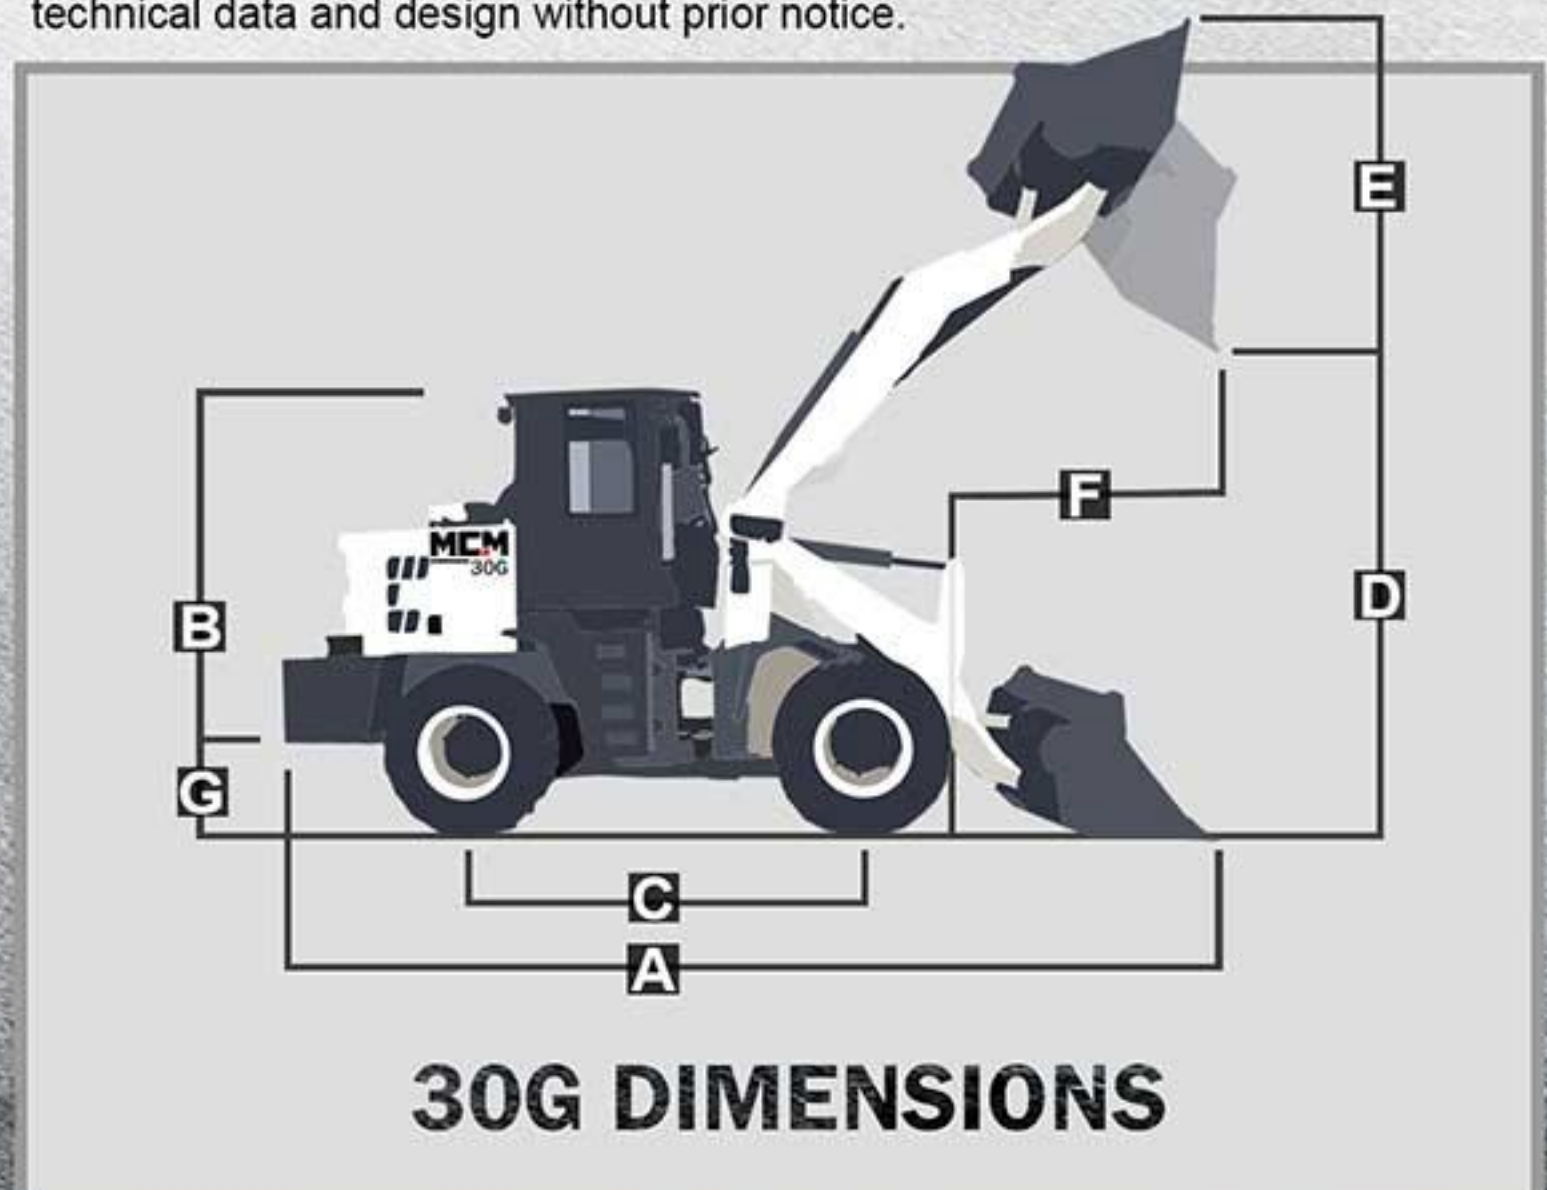

# BUILT TOUGH